




Belle




- Capable of complicated pattern display by individual pixel control
- Highly bendable and lightweight suitable for special purpose projects like car parade
- Higher pixel pitch 8.75mm as a bar type solution, more flexibility in housing structure as a media screen solution

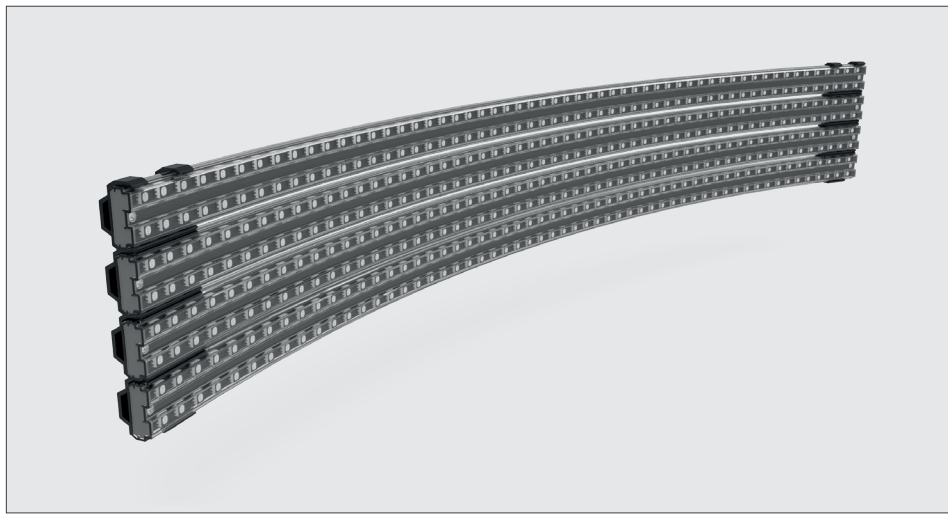

PRODUCT SPECIFICATIONS

LED Source	3 in1 Full Color LED	
Size (W×D×H)	490mm x 16.2mm x 7.2mm	Optional W140mm~490mm
Material	Polycarbonate	
Weight	50g (0.11lbs) ± 5%	
Power Consumption	2W	
Brightness	2,500 nit	
Pixel Pitch	8.75 mm	
Beam Angle	(H)120° x (V)120°	
Color Process	3 x 16 bit (Gamma Correction)	
Operating Voltage	4.5 ~ 5V DC	
Control	Video Control	
Protection	IP 66 (Outdoor/Indoor)	
Operating Temperature	-10°C ~ 40°C (14°F ~ 104°F)	
Storage Temperature	-20°C ~ 70°C (-4°F ~ 158°F)	

TECHNICAL DRAWING

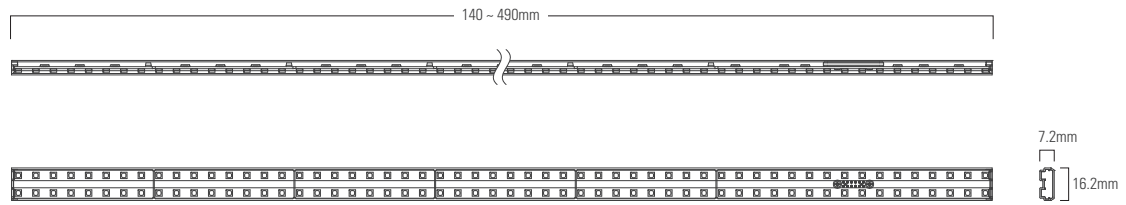

SYSTEM BLOCK DIAGRAM

