


NEW WINVISION **GL2**

2.5mm pixel pitch **High-resolution Indoor LED Display**

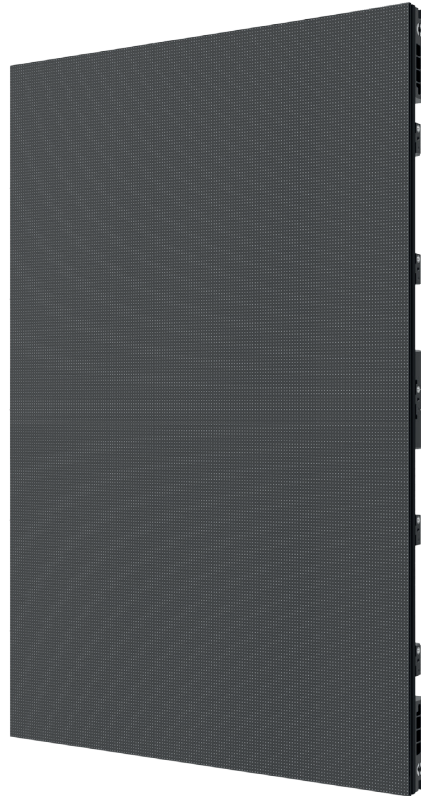

Key Feature

- Optimum brightness 1,200nit
- Light weight carbon fiber frame
- Wide viewing angle
- Easy setup & maintenance
- Replaceable PSU
- Front & Rear access available
- 16 bit color processing

PRODUCT SPECIFICATIONS

| | | |
|-----------------------|------------------|--|
| Application | | Rental, Fixed |
| Pixel Pitch | | 2.5mm |
| IP Rate | | Indoor |
| Brightness | | 1,200 cd/m ² |
| LED Type | | 3-in-1 SMD |
| Viewing Angle | degree : H | 160° |
| | degree : V | 160° |
| Size (W x H x D) | tile | Rental : 400mm x 600mm x 67.5mm Fixed : 400mm x 600mm x 52mm |
| Weight | tile | Rental : 5.3 kg (11.68 lbs) Fixed : 4.5 kg (9.92 lbs) |
| | sqm | Rental : 22.1 kg (48.72 lbs) Fixed : 18.75 kg (41.33 lbs) |
| Pixel Density | tile | 38,400 (160 x 240) px |
| | sqm | 160,000 px |
| Use Temperature | Operating | -10°C ~ 40°C (14°F ~ 104°F) |
| | Storage | -20°C ~ 50°C (-4°F ~ 122°F) |
| Lifetime | @ 50% Brightness | 100,000 hrs |
| Operating Voltage | | 100-240 VAC, 50/60 Hz |
| Power Consumption | tile | Max.130 W / Avg.52 W |
| | sqm | Max.540 W / Avg.220 W |
| Max. Power Connection | tile | 10(110V) / 20(220V) |
| Color Process | | 16 bit/color |
| Refresh Rate | | 3,840 Hz |
| Max. Hanging | tile | 9 |
| Servicing | | LDM : Front / PSU : Rear |
| Certifications | | KC |

