NEW WINVISION GL1

1.67mm pixel pitch **High-resolution Indoor** LED Display

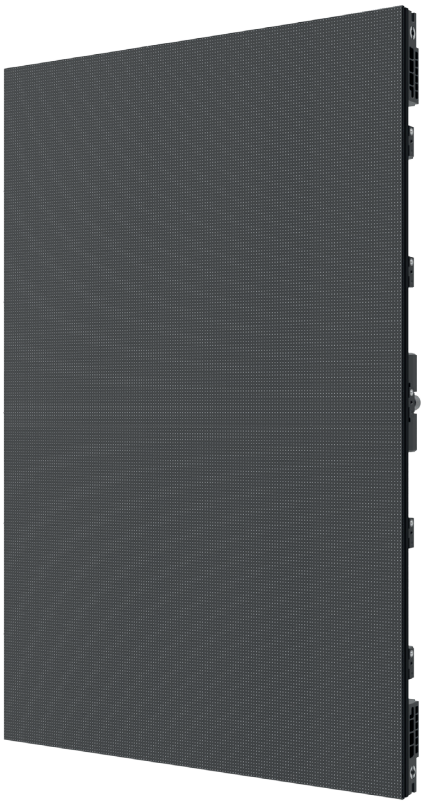

Key Feature

- Optimum brightness 800nit
- Light weight carbon fiber frame
- Wide viewing angle
- Easy setup & maintenance
- Replaceable PSU
- Front & Rear access available
- 16bit color processing

© GALAXIA ELECTRONICS CO.,LTD.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be modified without notice.

PRODUCT SPECIFICATIONS

Application		Renta, Fixed
Pixel Pitch		1.67mm
IP Rate		Indoor
Brightness		800cd/m²
LED Type		3-in-1 SMD
Viewing Angle	degree : H	160˚
	degree : V	160˚
Size (W x H x D)	tile	Rental : 400mm x 600mm x 67.5mm | Fixed : 400mm x 600mm x 52mm
Weight	tile	Rental : 5.3 kg (11.68 lbs) | Fixed : 4.5 kg (9.92 lbs)
	sqm	Rental : 22.1 kg (48.72 lbs) | Fixed :18.75 kg (41.33 lbs)
Pixel Density	tile	86,400 (240 x 360) px
	sqm	360,000 px
Use Temperature	Operating	-10˚C ~ 40˚C (14˚F ~ 104˚F)
	Storage	-20˚C ~ 50˚C (-4˚F ~ 122˚F)
Lifetime	@ 50% Brightness	100,000 hrs
Operating Voltage		100-240 VAC, 50/60 Hz
Power Consumption	tile	Max.180 W / Avg.72 W
	sqm	Max.748 W / Avg.300 W
Max. Power Connection	tile	10(110V) / 20(220V)
Color Process		16 bit/color
Refresh Rate		1,920 Hz
Max. Hanging	tile	9
Servicing		LDM : Front / PSU : Rear
Certifications		KC

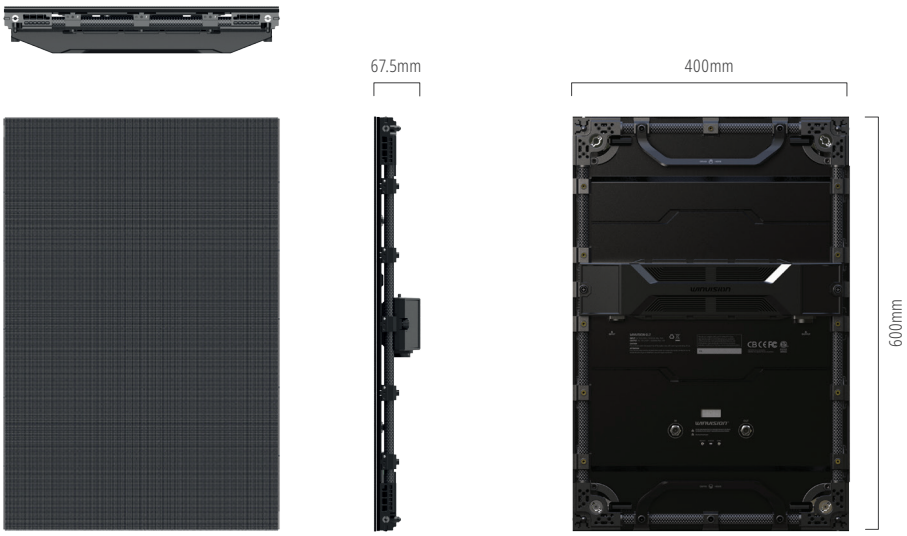

© GALAXIA ELECTRONICS CO.,LTD.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be modified without notice.